









Viksen

Varitile®
weather [p]roof

**The rustic charm of hand-split
wooden shingles**

The inspiration for Varitile Viksen traces its roots to ancient Viking architecture. Fortunately, these beautiful steel shingles won't burn or deteriorate like those roofs of old.




WIND **HAIL** **FREEZE/THAW** **ENERGY** **LIGHTNING** **IMPENETRABLE** **EARTHQUAKE** **FIRE**

www.varitile.com

Formed from the highest quality steel and protective coatings, the panel is incredibly strong, lightweight and weather resistant.

SPECIFICATIONS

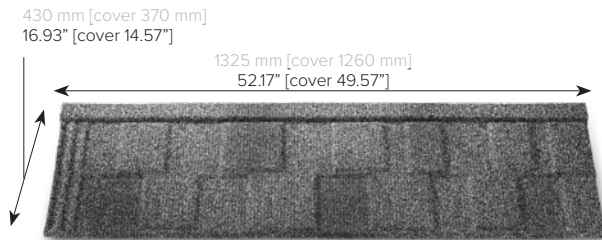

Minimum pitch	10°	3.5/12
Maximum pitch	90°	vertical
Size of tile - overall*	1325 x 430 mm	52.17" x 16.93"
Size of tile - cover*	1260 x 370 mm	49.57" x 14.57"
Gauge of steel**	0.45 mm	26 gauge
Linear cover width*	1260 mm	49.57"
Coverage*	2.15 pc/m ²	19.94 pc/square
Coverage of a panel*	0.47 m ²	5.01 ft ²
Weight per panel*	2.86 kg	6.31 lb

* With a tolerance of ± 3 mm on measurements and minimal tolerance in weight.
 ** Steel thickness according to the EN 10346.

COLORS




Color has a huge impact on the look of your house. Whether it is neutral shades, vibrant tones or subtle hues, there is something for everyone.

You can mix and match the wide color palette and profile to create something unique. With the special shades you create the perfect tones for your house.

Ask your dealer for more information regarding stock colors and leadtimes for special color and profile combinations.

INSTALLATION

Viksen panels are installed from right to left.

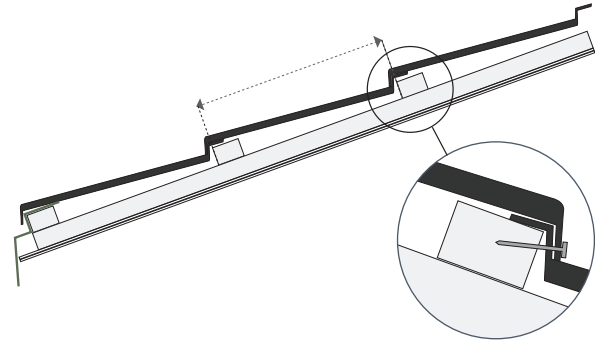

The panels are placed onto battens spaced 368 mm or 14.5".

A downturned front edge (nose) and upturned rear edge (shelf) on each tile creates a strong, weatherproof, overlapping and interlocking assembly. Each tile is secured with four nails in the panel nose, away from water channels.

ACCESSORIES

We offer a broad range of accessories.

- Ridges, junctions and end caps.
Offered in angled, squared and curved profiles.
- Fascia, sidewall and headwall transition flashings.
- Ventilation systems.
- Installation Equipment: nails, benders, guillotines.

It is important to use tools recommended by us.

For a complete and detailed list of accessories and more information regarding the installation of a Viksen roof, contact your dealer.